




# L | SERIES



# L | SERIES

The Hino L Series has a new sleek design! The exterior cab features a low spoiler for enhanced aerodynamics and LED signature headlamps. The interior design was inspired by the XL series, which has a stylish automotive grade finish with an air-ride driver's seat plus larger cab configurations for more versatility than ever before.

Available in day cab, the L Series trucks are maneuverable and efficient with GVWR ranging from 25,500 lbs. to 35,000 lbs. Add the industry leading warranty, supported by Hino Preventive Care and HINOWATCH Roadside Assistance, you can see why Hino trucks is the quality choice!

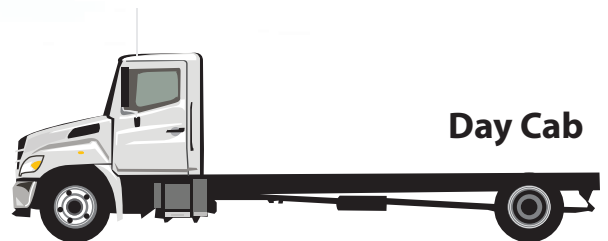

## SPECIFICATIONS

### ENGINE / DRIVETRAIN / AXLE

Engine model	Hino J08E, 7.7 litre, diesel
Type	6 cylinder in-line, water-cooled
Fuel System	Denso Common Rail, direct injection
Max. output @ 2,500 rpm	230-260 hp
Max. torque @ 1,500 rpm	520-660 lb.-ft.
Exhaust brake	Electric-pneumatic with valve in exhaust pipe
Transmission	Allison six speed automatic with FuelSense® 2.0 MAX
Front axle	Meritor MFS series reverse Elliot, "I" beam (oil lubricated)
Rear axle	Meritor, full floatin, single reduction, single-speed, hypoid gears

### ELECTRICAL EQUIPMENT

Batteries	<input type="checkbox"/> STD Two, parallel connection, 1300 CCA (2 x GR31) <input type="checkbox"/> OPT Third Battery (GR31) <input type="checkbox"/> OPT AGM Batteries (Quantity: 2) <input type="checkbox"/> OPT AGM Batteries (Quantity: 3)
Alternator	<input type="checkbox"/> STD 12V, 135A, brushless
Starter kW (hp)	12V, 4.8 (6.4)

### TANKS

Fuel Tank	<input type="checkbox"/> STD Single 189 litre (50 US gallon) <input type="checkbox"/> OPT Dual 189 litre (50 US gallon x 2) <input type="checkbox"/> OPT Single 340.7 litre (90 US gallon)
DEF tank litre (US gallon)	19 (5.0)

## WEIGHT CAPACITIES

Front axle range, kg (lbs.): 3,630 (8,000) - 4,540 (10,000)  
Rear axle range, kg (lbs.): 7,940 (17,500) - 8,620 (19,000)

# L6

**GVWR, kg (lbs.): 11,570 (25,500) - 11,771 (25,950)**

Engine HP  STD J08E-WU 230hp  OPT J08E -VB 260hp (L6LP, 217" WB)

Transmission model STD 2200RDS

Brakes  STD Hydraulic disc  OPT Full air, dual circuit

Rear suspension  STD Multi leaf spring  OPT Hendrickson air suspension with electric dump valve

Rear axle ratio  STD 5.57 (L6)  STD 4.11 (L6LP)

Wheel size  STD 22.5 x 8.25 (L6)  STD 19.5 x 6.75 (L6LP)

Tire size  STD 11R22.5 (L6)  STD 245/70R19.5 (L6LP)

Resisting bending moment, one side kgf-mm (in-lbs.) STD 1,188,862 (1,031,900)

Yield strength, kg/mm<sup>2</sup> (psi) STD 56.2 (80,000)

Wheel type  STD Powder coated white  OPT Aluminum Alcoa

Wheelbase (in.)  175  187  205  217  235  253  271

## STANDARD EQUIPMENT

- Air Conditioning
- AM/FM Audio System with Bluetooth®
- LED Low & High Beam
- Chrome Grille
- Tilt and Telescopic Steering Column with Lock
- Power Windows & Power Door Locks with Keyless Entry
- Power and Heated Outer Rearview Mirrors with Convex Mirrors (2)
- Driver's Seat - High-back seat with air suspension & arm rest
- Driver Controlled Differential Lock (L8)
- 1000W/120V Engine Block Heater
- Air Horn (L7A / L8)

## POPULAR OPTIONAL EQUIPMENT

- Rear Air Suspension
- Alcoa Alloy Wheel Set
- Driver Controlled Differential Lock (L7A)

## WEIGHT CAPACITIES

Front axle range, kg (lbs.): 5,440 (12,000)  
Rear axle range, kg (lbs.): 9,530 (21,000)

# L7

**GVWR, kg (lbs.): 14,950 (33,000)**

Engine HP STD J08E-VB 260hp

Transmission model  STD 2500RDS  OPT 2500HS (253" & 271" WB)

Brakes  STD Hydraulic, 4 wheel disc  OPT Full air, dual circuit

Rear suspension  STD Multi leaf spring  OPT Hendrickson air suspension  OPT Hendrickson 21K Severe Duty Air with electric dump valve

Rear axle ratio STD 5.57

Wheel size STD 22.5 x 8.25

Tire size STD 11R22.5

Resisting bending moment, one side kgf-mm (in-lbs.) STD 1,475,588 (1,280,800)

Yield strength, kg/mm<sup>2</sup> (psi) STD 56.2 (80,000)

Wheel type  STD Powder coated white  OPT Aluminum Alcoa

Wheelbase (in.)  187  205  217  235  253  271

## WEIGHT CAPACITIES

Front axle range, kg (lbs.): 5,990 (13,200)  
Rear axle range, kg (lbs.): 10,430 (23,000)

# L8

**GVWR, kg (lbs.): 15,870 (35,000)**

Engine HP STD J08E-VB 260hp

Transmission model STD 3000RDS

Brakes STD Full air, dual circuit, 4-wheel drum with ABS

Rear suspension  STD Multi leaf spring  OPT Hendrickson air suspension  OPT Hendrickson 23K Severe Duty Air with electric dump valve

Rear axle ratio STD 5.63

Wheel size STD 22.5 x 8.25

Tire size  STD 11R22.5  OPT 295-75R22.5

Resisting bending moment, one side kgf-mm (in-lbs.) STD 2,317,900 (1,933,200)

Yield strength, kg/mm<sup>2</sup> (psi) STD 87.8 (120,000)

Wheel type  STD Powder coated white  OPT Aluminum Alcoa

Wheelbase (in.)  187  205  217  235  253  271

- Multimedia Audio System with Bluetooth® and Navigation
- High Visibility Seat Belts
- Custom Cab Paint (exterior)

Steering wheel controls

7 inch large multi information display in gauge cluster

Fast charging USB ports

Cup holder



Increased leg room plus well positioned interior grab handles



Increased storage space

# THE HINO OWNER ADVANTAGE



Every Hino truck comes standard with a Total Support Package, which includes Hino Premium Protection, a comprehensive vehicle protection plan that protects your investment and enhances the longevity of your truck.\*

\*Contact your closest local Hino dealership for further details.

Hino provides quality products backed by a comprehensive warranty!

### L Series Warranty Coverage

Hino's legendary 7.7 litre J08E engine is covered by a 5-year / 400,000 km warranty.

### Peace of mind.

HINOWATCH protects your Hino truck with 24-hour roadside assistance at no extra charge, unlimited mileage for the first 3 years. HINOWATCH includes lockout, out of fuel, battery jumpstart and warranty towing.

DISCLAIMER: HINO MOTORS CANADA, LTD reserves the right to discontinue items, or make changes at any time, without notice, to equipment, specifications, or materials.

